


The safe protection from build-up

REMALINE 25

Our high-quality **REMALINE** lining offers optimum surface protection for your machines and equipment. You avoid unnecessary costs for maintenance and downtime, thereby increasing the productivity of your equipment many times over.

Application areas

Thanks to its elastic properties, **REMALINE 25** lining is suitable for preventing build-up in equipment conveying sand/water mixtures and fine material. Furthermore, **REMALINE 25** lining offers excellent noise dampening and reduction of noise emissions.

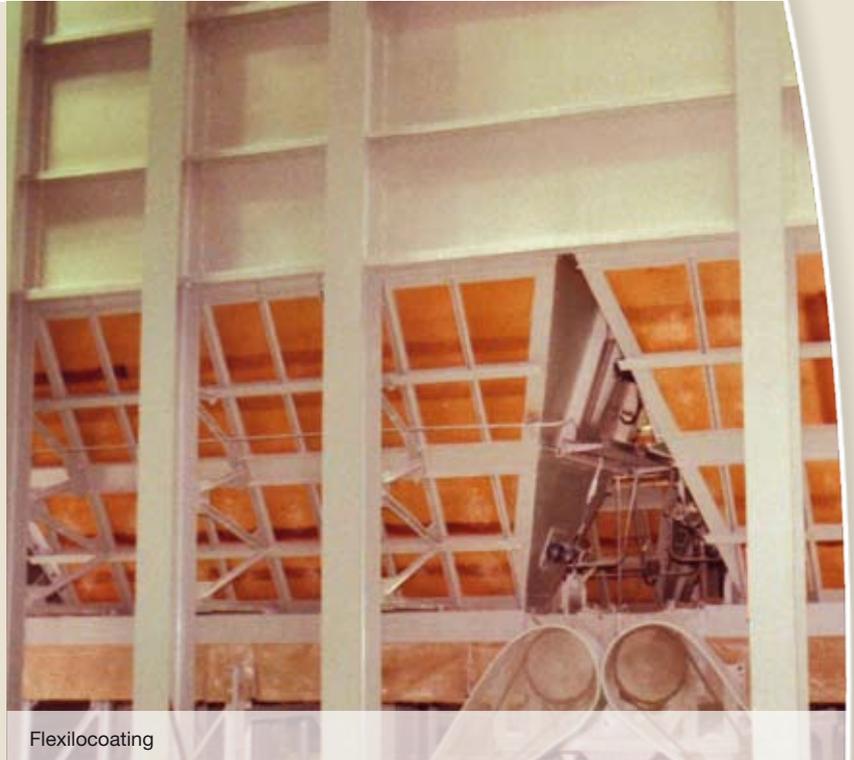

Flexilocoating



Typical fields of use

- Covers for conveyor rollers
- Lining of elevator buckets and excavator buckets
- Outlet funnels for dry mortar
- Flexilo and bunker lining
- Noise reduction lining
- Cushioning cover for rollers
- Also used as a dust cover

Advantages

- Safe protection from material build-up
- Less noise in your equipment
- Easy and fast installation
- Technical consultation and data available anytime
- ▶ **Increases the efficiency of your equipment**

The safe protection from build-up

REMALINE 25

Technical properties

Product characteristics	REMALINE 25 is a soft material based on natural rubber with elastic properties.	
	CN bonding layer: REMALINE 25 comes equipped with a CN bonding layer which affords the product an extremely good adhesive quality in combination with the REMA TIP TOP adhesive systems.	
Storage stability	Max. 24 months ▶ At 25 °C ± 2 °C with no loss in quality. Subject to DIN regulation 7716.	
Color		black
Polymer	DIN ISO 1629	NR
Specific weight	DIN EN ISO 1183	0,98 g/cm ³
Hardness	ISO 868-2003 (DIN 53505)	33 ± 5 Shore A
Abrasion at 5 N	DIN ISO 4649-2006	95 mm ³
Resilience elasticity	ISO 4462-1986 (DIN 53512)	75 %
Available sizes*	Standard thickness in mm	3 - 20
	Standard width in mm	1 500 or 2 000

*Other dimensions available on request.

REMALINE 25 is also available with fabric reinforcement.

REMA TIP TOP GmbH
Business Unit Industrie

Gruber Strasse 63
Phone:
Fax:
www.rema-tiptop.com

85586 Poing/Germany
+49 8121 707-234
+49 8121 707-222
info@tiptop.de

Your local contact:

582 1061 - II.07 Printed in Germany

